

Rockwool Marine & Offshore Insulation Facings

Products and types of facings

Rockwool A/S markets a wide range of products with different facings.

The standard range includes the following products:


Products	L mm	W mm	T mm	Glass fabric		Reinforced alu foil
				White	Black	
Marine Batts 32	1000	600	50,100			x
Marine Batts 32 RL	4000	1000	50,75, 100			x
Marine Batts 45	1000	600	25-100	GW 200		x
Marine Firebatts 100	1000	600	25,40,60	GW 200		x
Marine Firebatts 130	1000	600	30-65	GW 200		x
HC Firebatts 150 (offshore)	1000	600	50,65			x
Marine Wired Mat 90	2-7000	900/1000	30,50,90	GW 400	GB 200	
Marine Wired Mat 105	2-7000	900/1000	30	GW 400	GB 200	x

(Other products and facings can be supplied on request).

Specifications of facing


		Weight thickness	Type
Batts	Glass fabric GW200	210 g/m ²	7628
	Glass fabric GW400	415 g/m ²	3772
Wired Mat	Glass fabric GB200	205 g/m ²	92111
	Glass fabric GW400	435 g/m ²	440

Positioning of facings (glass fabric)

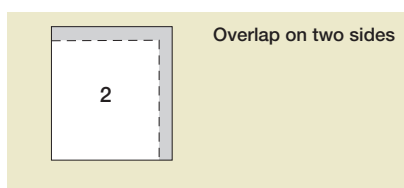

Batts/ Firebatts

Standard products are delivered with overlap on two sides. The overlap is approx. 30mm. E.g. Marine Firebatts 130 GW 200-2. Marine Firebatts 130 delivered with white glass fabric, 210 g/m², with 30mm overlap on two sides. Other positions of the facing are available on request.

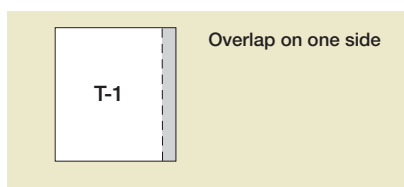


Wired Mat

Standard products are delivered with the glass fabric on top of the wire mesh with an overlap on 1 long side. Overlap is approx. 100mm. The Wired Mats are delivered with an overlap of 700-1000mm at both ends (short side). E.g. Marine Wired Mat 105 GW 400 T-1. Marine Wired Mat 105 with white glass fabric, 435 g/m², on top of the wire mesh and an overlap of 100mm on one side. Other positions of the facing available on request.



Rockwool A/S
 DK-2640 Hedehusene
 Tel.: +45 46 56 16 16
 Fax: +45 46 56 16 04
 E-mail: export@rockwool.dk
 Internet: www.rockwool-marine.com

Rockwool Marine & Offshore:
 Hong Kong Office
 Suite 1303, Asia Orient Tower, Town Place
 33 Lockhart Road, Wanchai, Hong Kong
 Tel: +852 2866 6180
 Fax: +852 2866 9555



Rockwool A/S reserves the right to make necessary product changes at any time. Technical specifications are thus stated subject to change.